


Industrial Clutch Products



MODEL LKM

Air Set Marine Clutches

LKM Clutch Design Features

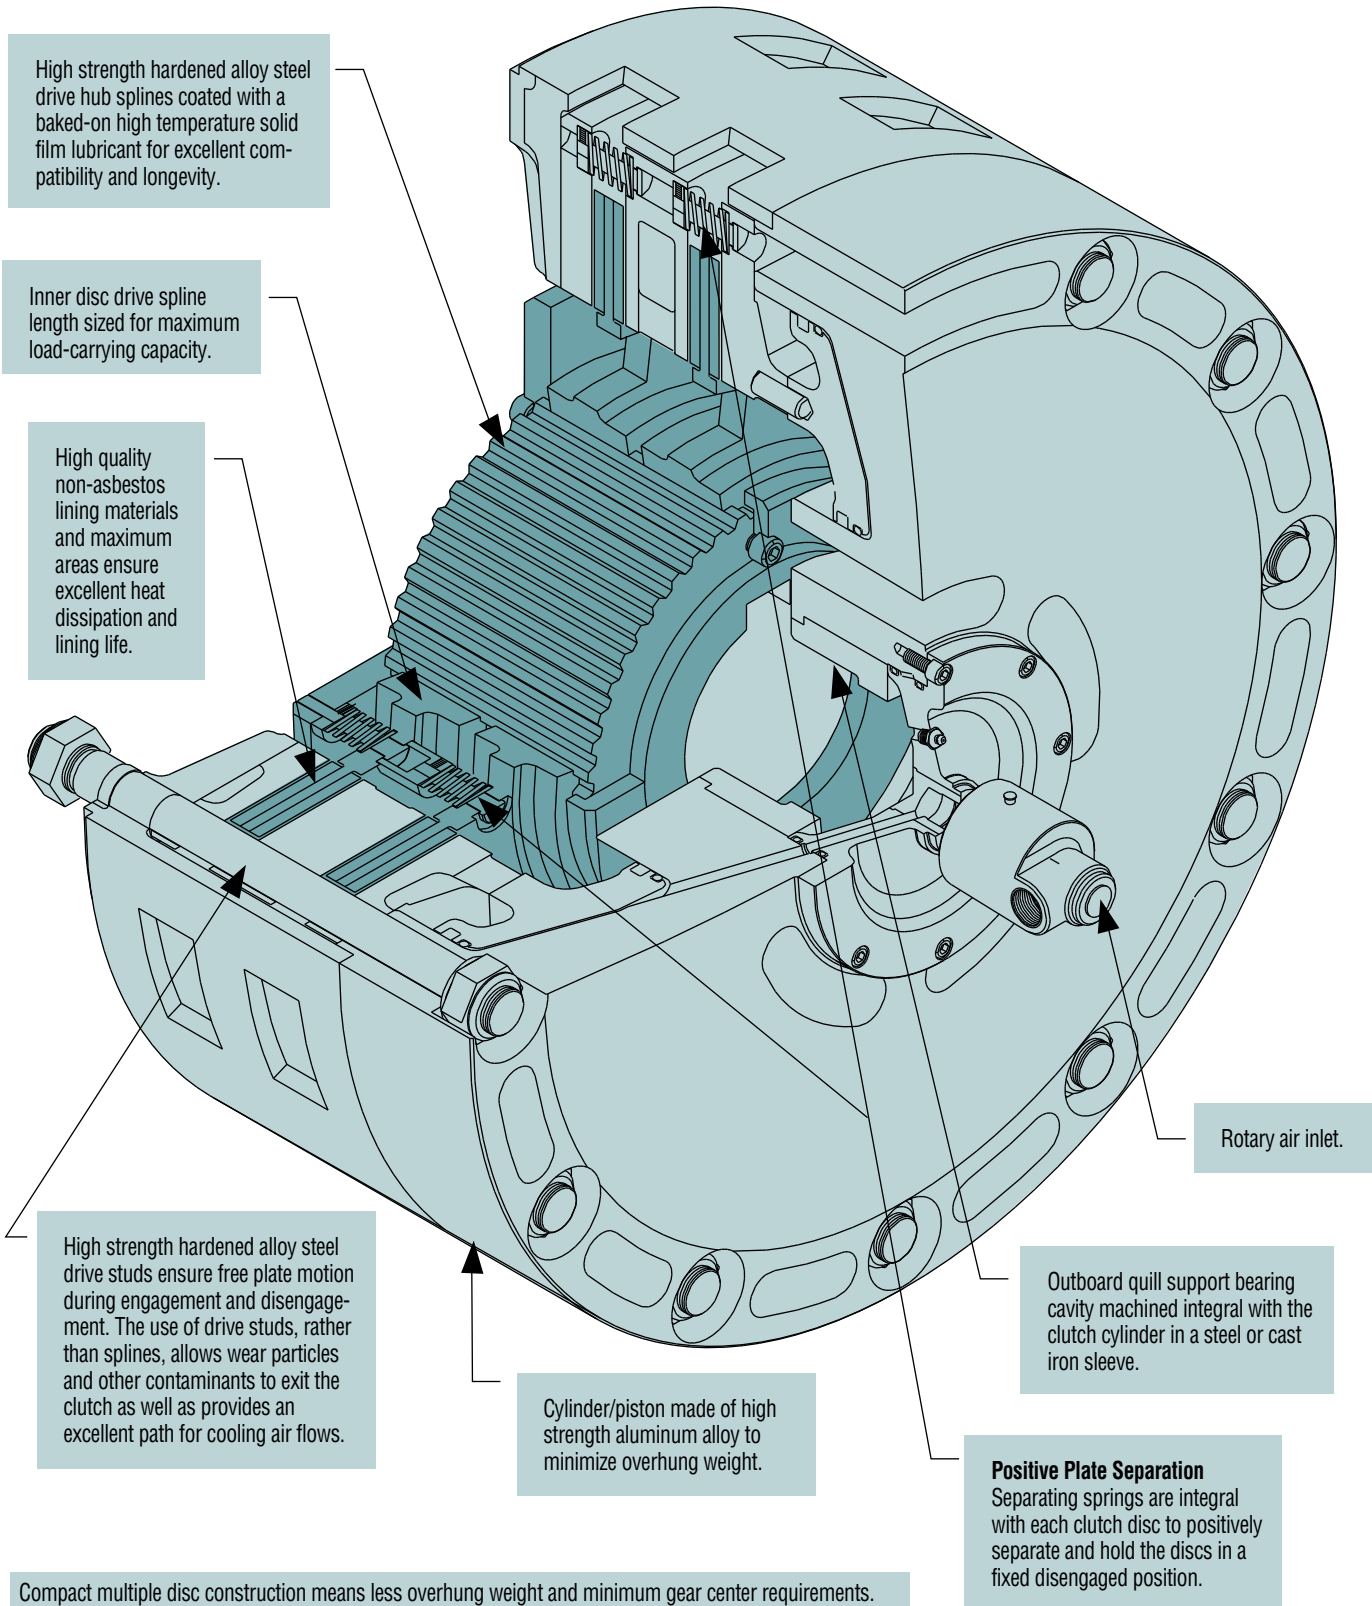

High strength hardened alloy steel drive hub splines coated with a baked-on high temperature solid film lubricant for excellent compatibility and longevity.

Inner disc drive spline length sized for maximum load-carrying capacity.

High quality non-asbestos lining materials and maximum areas ensure excellent heat dissipation and lining life.

Rotary air inlet.

High strength hardened alloy steel drive studs ensure free plate motion during engagement and disengagement. The use of drive studs, rather than splines, allows wear particles and other contaminants to exit the clutch as well as provides an excellent path for cooling air flows.

Cylinder/piston made of high strength aluminum alloy to minimize overhung weight.

Outboard quill support bearing cavity machined integral with the clutch cylinder in a steel or cast iron sleeve.

Positive Plate Separation
Separating springs are integral with each clutch disc to positively separate and hold the discs in a fixed disengaged position.

Compact multiple disc construction means less overhung weight and minimum gear center requirements.

Clutch designed with total attention given to maximizing ventilation for cool-running operation and the ability to perform high energy engagements with minimum temperature build-up.

Precision machining of all components ensures positive interchangeability of all mating parts.

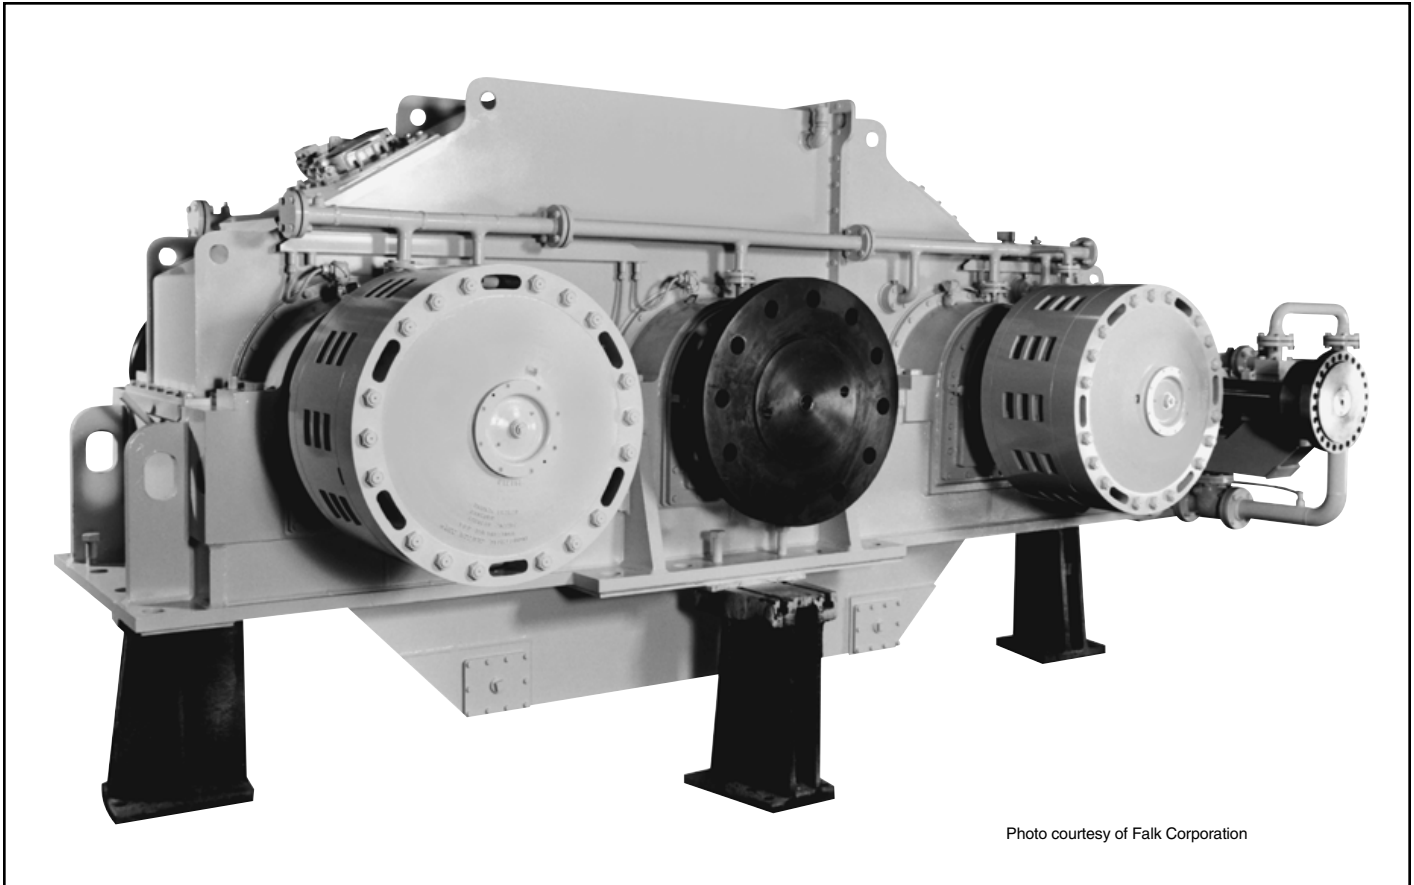


Photo courtesy of Falk Corporation

Model LKM-330-B clutches, each rated 5250 HP @ 500 RPM connect dual engine inputs to a single propeller on a Falk Model 55 x 20 DMA1-S marine gear.

LKM AIR SET MARINE CLUTCH DEVELOPMENT HISTORY

The Model LKM marine clutch incorporates many of the features found in our Model LK clutch series with some notable exceptions. Cyclic applications, where the LK style finds its most frequent use, contain duty cycles which bear little resemblance to marine main propulsion service. Marine clutches are required to make infrequent, yet in some instances, severe engagements from a heat standpoint. The clutches are also called upon to run for extended periods in the engaged position (ahead clutches) and for extended periods in the disengaged position (reverse clutches).

The Model LK clutches were rugged enough to handle the load duty cycle from a torque and heat standpoint but required modification to their separation systems in order to be suitable for marine service. Industrial Clutch Products was the first to recognize the importance of positive plate separation for marine service and **all** clutches installed in marine service contained this feature. Disc clutches for marine service without positive plate separation have experienced a sad approval rating from users.

This is particularly true in forward/reverse service where, strangely enough, the unloaded reverse clutch gives the greatest degree of trouble. Because of the gearing arrangement, the outer members of this clutch rotate in one direction while the


inner member rotates in the other. This gives rise to the term “twice relative rotation.” The cant of the gear to which these clutches are mounted in order to align with the propeller shaft as well as vessel motion due to wave action causes the clutch plates, if not positively separated, to kiss and wear or burn-out. Exactly the same result would occur if one were going down the road in an automobile at a high rate of speed with the brake pedal lightly depressed.

To eliminate this, Industrial Clutch Products designed and patented **positive plate separation** which has accrued over 30 years of field experience in marine main propulsion service. The separating system is self-adjusting for wear and no adjustments are ever required by the user during regular use or during routine maintenance. No plate contact can occur with this unique positive plate separation system and the many advantages of the disc clutch can be fully realized for marine service.

The incorporation of positive plate separation, a bearing cavity for the outboard quill bearing, and modifications made to increase the load carrying capacity on a continual basis changed the time-proven LK design into the Model LKM marine clutch.

Model LKM

DOUBLE DISK LKM CLUTCH

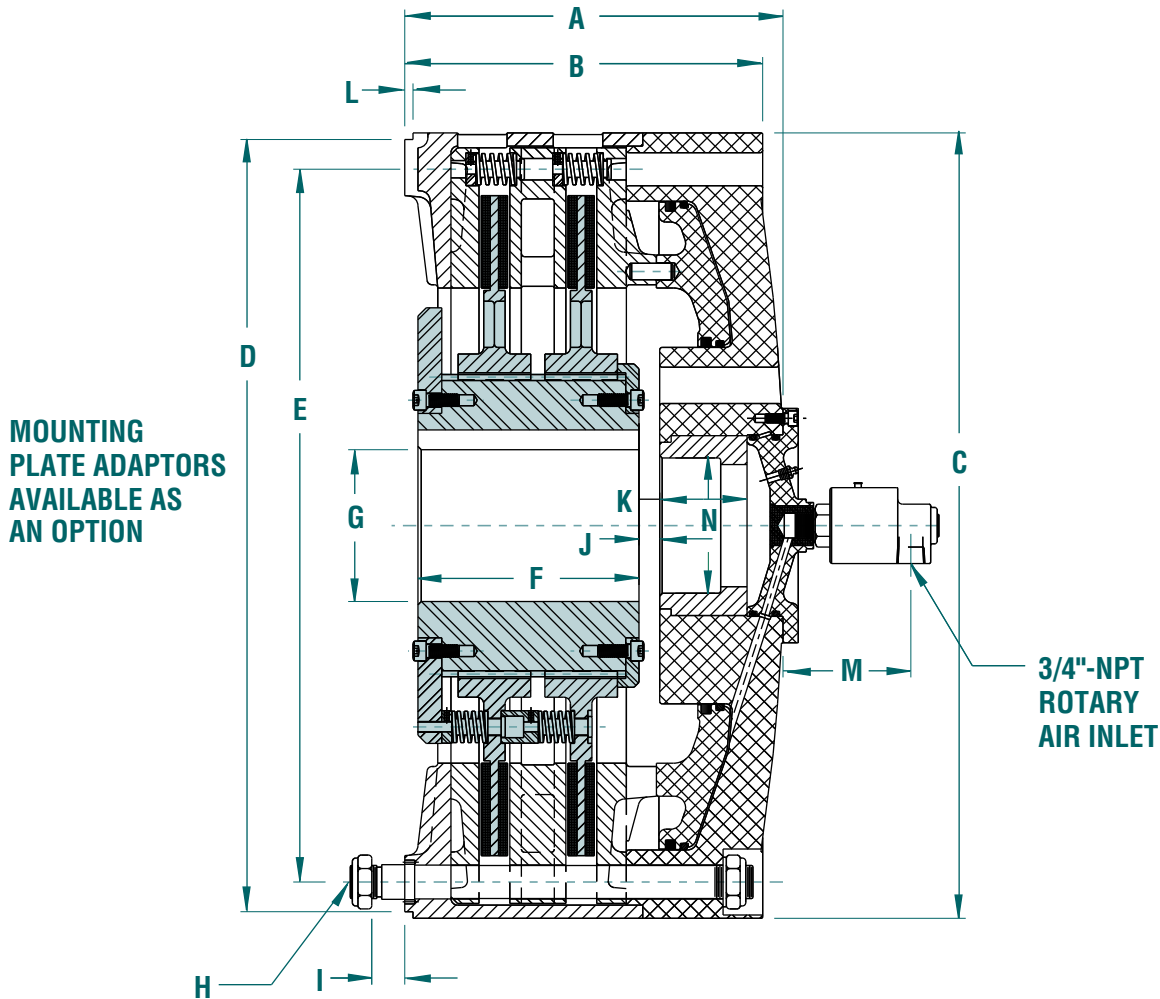

DIMENSIONAL DATA

All dimensions in inches

| LKM Model | A | B | C | D | E | F | G Min.-Max. | H No.-Size | I | J | K | L | M | N Min.-Max. |
|-----------|-------|-------|-------|-------|-------|-------|----------------|---------------|-------|------|------|-----|-------|-----------------|
| LKM-213 | 8.69 | 7.86 | 16.63 | 16.25 | 14.65 | 5.25 | 2-7/8 - 3-1/2 | 8-15/16 | 1 | .44 | 1.50 | .18 | 4 | 3-1/2 - 4-3/8 |
| LKM-313 | 10.50 | 9.69 | 16.63 | 16.25 | 14.63 | 7.06 | 2-7/8 - 3-1/2 | 8-15/16 | 1 | .44 | 1.50 | .18 | 4 | 3-1/2 - 4-3/8 |
| LKM-218 | 11.31 | 10.31 | 22.63 | 21.50 | 20.00 | 7.75 | 2-7/8 - 4-1/8 | 12 - 1-1/16 | 1 | .56 | 1.38 | .18 | 4 | 4-1/2 - 5-9/16 |
| LKM-318 | 14.19 | 13.19 | 22.63 | 21.50 | 20.00 | 10.63 | 2-7/8 - 4-1/8 | 12 - 1-1/16 | 1 | .56 | 1.38 | .18 | 4 | 4-1/2 - 5-9/16 |
| LKM-221 | 11.06 | 10.44 | 25.00 | 24.50 | 22.50 | 6.81 | 3-3/8 - 5-1/2 | 12 - 1-1/16 | 1 | .31 | 2.19 | .18 | 4 | 4-1/2 - 5-15/16 |
| LKM-321 | 13.63 | 13.00 | 25.00 | 24.50 | 22.50 | 9.38 | 3-3/8 - 5-1/2 | 12 - 1-1/16 | 1 | .31 | 2.19 | .18 | 4 | 4-1/2 - 5-15/16 |
| LKM-225 | 14.38 | 13.63 | 29.75 | 29.25 | 27.00 | 8.50 | 4-5/8 - 7-1/2 | 12 - 1-5/16 | 1-1/4 | .78 | 3.31 | .18 | 4 | 4-1/2 - 6 |
| LKM-325 | 17.63 | 16.86 | 29.75 | 29.25 | 27.00 | 11.75 | 4-5/8 - 7-1/2 | 12 - 1-5/16 | 1-1/4 | .78 | 3.31 | .18 | 4 | 4-1/2 - 6 |
| LKM-230 | 15.63 | 13.25 | 35.50 | 35.00 | 32.00 | 9.00 | 5-1/4 - 9-5/8 | 12 - 1-1/4 | 2 | 1.06 | 3.06 | .25 | 4-5/8 | 5 - 8 |
| LKM-330 | 18.94 | 16.56 | 35.50 | 35.00 | 32.00 | 12.25 | 5-1/4 - 9-5/8 | 12 - 1-1/4 | 2 | 1.06 | 3.06 | .25 | 4-5/8 | 5 - 8 |
| LKM-235 | 15.63 | 13.38 | 41.50 | 40.75 | 36.88 | 7.69 | 8 - 12 | 24 - 1-1/4 | 2 | 1.13 | 3.88 | .25 | 3-7/8 | 6 - 9-1/16 |
| LKM-335 | 18.06 | 15.81 | 41.50 | 40.75 | 36.88 | 10.13 | 8 - 12 | 24 - 1-1/4 | 2 | 1.13 | 3.88 | .25 | 3-7/8 | 6 - 9-1/16 |
| LKM-242 | 18.27 | 16.58 | 48.75 | 48.00 | 44.00 | 10.75 | 8 - 12 | 24 - 1-3/4 | 3 | 1.00 | 4.00 | .25 | 3-7/8 | 6-1/2 - 9-1/16 |
| LKM-342 | 22.13 | 20.44 | 48.75 | 48.00 | 44.00 | 14.63 | 8 - 12 | 24 - 1-3/4 | 3 | 1.00 | 4.00 | .25 | 3-7/8 | 6-1/2 - 9-1/16 |
| LKM-248 | 21.02 | 18.77 | 54.75 | 54.00 | 50.00 | 11.56 | 9-1/8 - 14 | 24 - 1-3/4 | 3 | 1.38 | 5.00 | .25 | 2-3/4 | 10 - 14.50 |
| LKM-348 | 25.50 | 23.25 | 54.75 | 54.00 | 50.00 | 16.00 | 9-1/8 - 14 | 24 - 1-3/4 | 3 | 1.38 | 5.00 | .25 | 2-3/4 | 10 - 14.50 |

- NOTES: 1.) Use certified drawing dimensions only for final layouts.
 2.) DXF and IGES files available upon request.
 3.) Dimensions subject to change without notice.
 4.) Consult factory or refer to application information when selecting units.

OPERATIONAL DATA

| LKM Model | Static Torque @ 125 PSIG (lb.-in.) | Dynamic Torque @ 125 PSIG (lb.-in.) | Weight Outer (lbs.) | Weight Inner (lbs.) | Total Weight (lbs.) | WR ² Outer (lb.-ft. ²) | WR ² Inner (lb.-ft. ²) | Maximum Speed (RPM) |
|-----------|------------------------------------|-------------------------------------|---------------------|---------------------|---------------------|---|---|---------------------|
| LKM-213 | 94,600 | 82,000 | 155 | 65 | 220 | 50 | 7 | 2100 |
| LKM-313 | 142,000 | 123,000 | 220 | 90 | 310 | 70 | 9 | 2100 |
| LKM-218 | 200,000 | 173,333 | 440 | 135 | 575 | 255 | 24 | 1600 |
| LKM-318 | 300,000 | 260,000 | 480 | 200 | 680 | 284 | 35 | 1600 |
| LKM-221 | 382,000 | 331,000 | 430 | 200 | 630 | 320 | 50 | 1400 |
| LKM-321 | 572,000 | 445,733 | 525 | 285 | 810 | 396 | 71 | 1400 |
| LKM-225 | 510,000 | 442,000 | 730 | 360 | 1,090 | 775 | 110 | 1200 |
| LKM-325 | 765,000 | 663,000 | 850 | 451 | 1,301 | 836 | 158 | 1200 |
| LKM-230 | 1,000,000 | 866,666 | 1,095 | 475 | 1,570 | 1,456 | 222 | 1000 |
| LKM-330 | 1,500,000 | 1,300,000 | 1,290 | 710 | 2,000 | 1,894 | 320 | 1000 |
| LKM-235 | 1,455,000 | 1,261,000 | 1,925 | 675 | 2,600 | 3,091 | 472 | 850 |
| LKM-335 | 2,183,000 | 1,892,000 | 2,088 | 1,012 | 3,100 | 4,580 | 720 | 850 |
| LKM-242 | 2,716,000 | 2,354,000 | 2,770 | 1,098 | 3,868 | 7,495 | 990 | 700 |
| LKM-342 | 4,074,600 | 3,531,320 | 3,305 | 1,565 | 4,870 | 9,148 | 1,458 | 700 |
| LKM-248 | 2,466,600 | 3,004,386 | 3,942 | 1,535 | 5,477 | 13,048 | 1,752 | 650 |
| LKM-348 | 5,200,000 | 4,506,666 | 4,721 | 2,205 | 6,926 | 15,989 | 2,584 | 650 |

SELECTION CHART – MARINE ENGINE HORSEPOWER (S.F. 2.0 @ 125 PSIG)

| Clutch RPM | 250 | 500 | 750 | 1000 | 1250 | 1500 | 1750 | 2000 | 2500 | 3000 | 3500 | 4000 | 4500 | 5000 | 6000 | 7000 | 8000 | 9000 | 10000 | 12000 | 14000 | 16000 | 18000 | 20000 | Clutch RPM | |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------|-------|------------|------|
| 150 | 318 | 321 225 | 325 230 | 230 | 330 235 | 330 235 | 330 | 335 242 | 335 242 | 242 | 342 248 | 342 248 | 342 | 348 | 348 | - | - | - | - | - | - | - | - | - | - | 150 |
| 200 | 218 | 221 | 321 225 | 325 230 | 230 | 230 | 330 225 | 330 225 | 335 242 | 335 242 | 242 | 242 | 342 248 | 342 248 | 348 | 348 | 348 | - | - | - | - | - | - | - | - | 200 |
| 250 | 313 218 | 318 221 | 221 | 321 | 325 230 | 325 230 | 230 | 330 225 | 330 225 | 335 242 | 335 242 | 335 242 | 242 | 242 | 342 248 | 342 | 342 | 348 | 348 | - | - | - | - | - | - | 250 |
| 300 | 313 218 | 318 221 | 221 | 321 225 | 321 | 325 230 | 230 | 330 235 | 330 235 | 330 | 330 242 | 335 242 | 335 242 | 335 242 | 242 | 342 248 | 342 248 | 342 | 348 | 348 | - | - | - | - | - | 300 |
| 350 | 313 218 | 318 221 | 318 221 | 221 | 321 225 | 321 | 325 230 | 325 230 | 230 | 330 235 | 330 235 | 330 235 | 335 242 | 335 242 | 335 242 | 242 | 342 248 | 342 248 | 342 | 342 | 348 | - | - | - | - | 350 |
| 400 | 213 | 218 | 318 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 335 242 | 335 242 | 242 | 342 248 | 342 248 | 342 | 342 | 348 | 348 | - | - | - | 400 |
| 450 | 213 | 313 218 | 318 221 | 318 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 335 242 | 335 242 | 242 | 242 | 342 248 | 342 248 | 342 | 348 | 348 | - | - | 450 |
| 500 | 213 | 313 218 | 318 218 | 318 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 335 242 | 335 242 | 242 | 242 | 342 248 | 342 248 | 342 | 348 | 348 | 342 | 348 | 500 |
| 550 | 213 | 313 218 | 318 218 | 318 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 335 242 | 335 242 | 242 | 242 | 342 248 | 342 248 | 342 | 348 | 348 | 348 | 348 | 550 |
| 600 | 213 | 313 218 | 318 218 | 318 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 330 | 335 242 | 335 242 | 335 242 | 335 242 | 242 | 342 248 | 342 248 | 342 | 348 | 348 | 600 |
| 650 | 213 | 313 218 | 318 218 | 318 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 230 | 230 | 230 | 230 | 230 | 330 235 | 330 235 | 335 242 | 335 242 | 335 242 | 242 | 342 248 | 342 248 | 342 | 342 | 342 | 650 |
| 700 | 213 | 213 | 313 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 | 325 230 | 325 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 335 242 | 335 242 | 335 242 | 242 | 242 | 342 | 342 | 342 | 700 |
| 750 | 213 | 213 | 313 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 | 325 230 | 325 230 | 230 | 230 | 230 | 330 235 | 330 235 | 335 | 335 | 335 | - | - | - | - | - | 750 |
| 800 | 213 | 213 | 313 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 | 325 230 | 325 230 | 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 335 | 335 | - | - | - | - | - | 800 |
| 850 | 213 | 213 | 313 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 | 325 230 | 325 230 | 230 | 230 | 230 | 330 235 | 330 235 | 330 235 | 330 | - | - | - | - | - | - | 850 |
| 900 | 213 | 213 | 313 218 | 313 218 | 218 | 318 221 | 318 221 | 221 | 321 225 | 321 | 325 230 | 325 230 | 230 | 230 | 230 | 330 | 330 | 330 | 330 | 330 | - | - | - | - | - | 900 |
| 1000 | 213 | 213 | 213 | 313 218 | 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 225 | 321 | 325 230 | 325 230 | 230 | - | - | - | - | - | - | - | - | - | 1000 |
| 1100 | 213 | 213 | 213 | 313 218 | 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 225 | 321 | 321 | 325 | - | - | - | - | - | - | - | - | - | - | 1100 |
| 1200 | 213 | 213 | 213 | 313 218 | 313 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 225 | 321 | 321 | 325 | - | - | - | - | - | - | - | - | - | - | 1200 |
| 1400 | 213 | 213 | 213 | 313 218 | 313 218 | 218 | 318 221 | 318 221 | 221 | 221 | 321 225 | 321 225 | 221 | 221 | 321 | - | - | - | - | - | - | - | - | - | - | 1400 |
| 1600 | 213 | 213 | 213 | 213 | 313 218 | 313 218 | 313 218 | 218 | 218 | 318 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 1600 |
| 1800 | 213 | 213 | 213 | 213 | 213 | 313 | 313 | 313 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 1800 |
| 2000 | 213 | 213 | 213 | 213 | 213 | 313 | 313 | 313 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 2000 |

LKM MARINE CLUTCH APPLICATION INFORMATION

The selection chart on the previous page is suitable for forward/reverse main propulsion service at 125 PSI actuation.

For controllable pitch propellers, dredge pumps, winches, and fire pumps use the following service factors.

| Machinery | Service Factor |
|---|--------------------|
| Main Propulsion Cont. Pitch Prop. | 1.8 |
| Winches, Centrifugal Fire Pumps | 1.65 |
| Centrifugal Dredge Pumps | 2.5 |
| Main Propulsion Continuous Slip from Engine Idle | Consult Factory |

Example: CENTRIFUGAL DREDGE PUMP DISCONNECT CLUTCH APPLICATION.

Input Parameters

The engine is rated 3000 HP and the shaft the clutch is to be mounted on is rotating at 900 RPM. The available air pressure is 150 PSIG.

$$\text{Working Torque} = \frac{\text{HP} \times 63025}{\text{RPM}} = \frac{3000 \times 63025}{900} = 210083 \text{ LBIN}$$

$$\begin{aligned} \text{Minimum Static Torque} &= \text{Work Torque} \times \text{Service Factor} \\ &= 210083 \times 2.5 = 525208 \text{ LBIN} \end{aligned}$$

$$\text{Minimum Catalogue Rating} = \text{Static Torque Req'd} \times \frac{\text{Rated Press}}{\text{Supply Press}}$$

$$\text{Minimum Catalogue Rating} = 525208 \times \frac{125}{150} = 437674 \text{ LBIN}$$

The Model LKM-225-B (rated at 510,000 LB-IN) is selected from the static torque column shown in the operational data chart on the previous page. This unit is the nearest size that meets or exceeds the value of 437,674 LB-IN required.

The allowable speed for the Model LKM-225-B is 1200 RPM and exceeds the operating speed of 900 RPM. The selection is appropriate from a torque and speed standpoint.

Dredge pumps can draw extraneous matter into the pump which may suddenly stall the pump impeller. This places a huge shock on the drive system and the clutch is called upon to act as a fuse in these instances. A review of the magnitude of the actual applied service factor is *always* required to be certain the drive system components can withstand these overloads. It may be necessary to reduce the clutch service factor which increases the likelihood of clutch damage but saves a more costly drive system repair.

The preferred way to reduce the service factor is to adjust the operating air pressure accordingly and maintain the clutch size as originally selected.

The following procedure may be used to calculate the air pressure required for any desired service factor. In this example, the recommended service factor was 2.5. We selected a Model LKM-225-B clutch since it was the closest unit that met or exceeded the calculated torque requirement of 437,674 LB-IN. Note that the actual service factor is 2.91.

$$\text{Tact} = \text{Actual Static Capacity} = \text{Cat. Stat. Rating} \times \frac{\text{Supply Press}}{\text{Rated Press}}$$

$$\text{Tact} = 510000 \times \frac{150}{125} = 612000 \text{ LBIN}$$

$$\text{Actual Serv. Fact.} = \frac{\text{Tact}}{\text{Working Torq}} = \frac{612000}{210083} = 2.91$$

If, by way of example, it was decided that a service factor of 2.0 was required, the supply air pressure should be set at 103 PSI.

$$\text{Operating Pressure} = \frac{125 \times \text{Req'd. Serv. Fact.} \times \text{Work Torq}}{\text{Cat. Stat. Torq. Rating}}$$

$$\text{Operating Pressure} = \frac{125 \times 2.0 \times 210083}{510000} = 103 \text{ PSIG}$$

To summarize, a Model LKM-225-B operating at 103 PSIG will provide a 2.0 service factor for this application.